





PLAN LEGEND

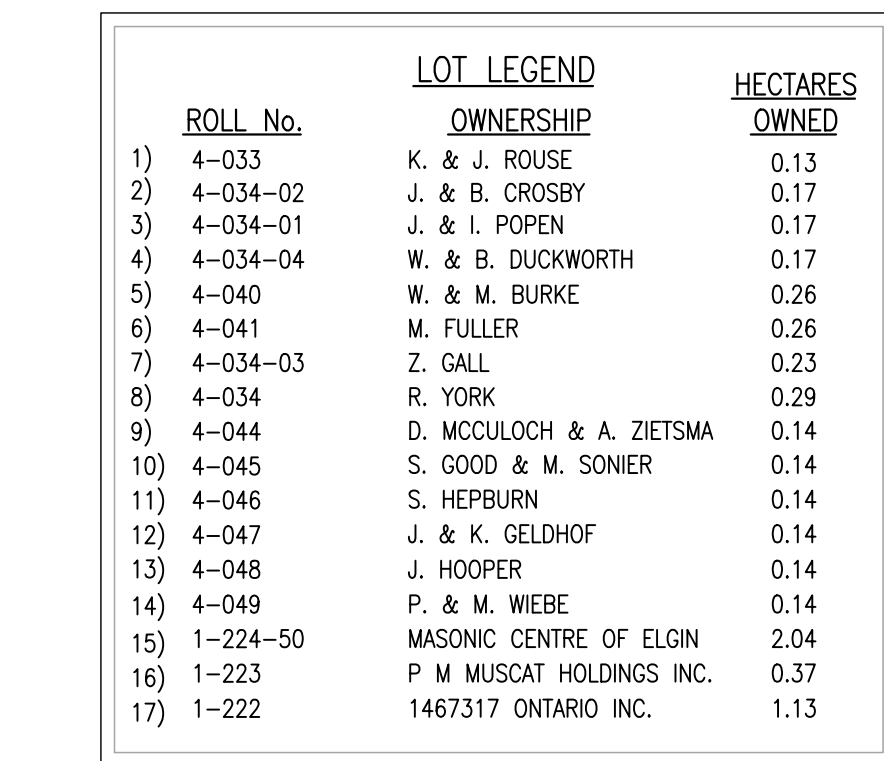

DETAIL "A"

N. T. S.

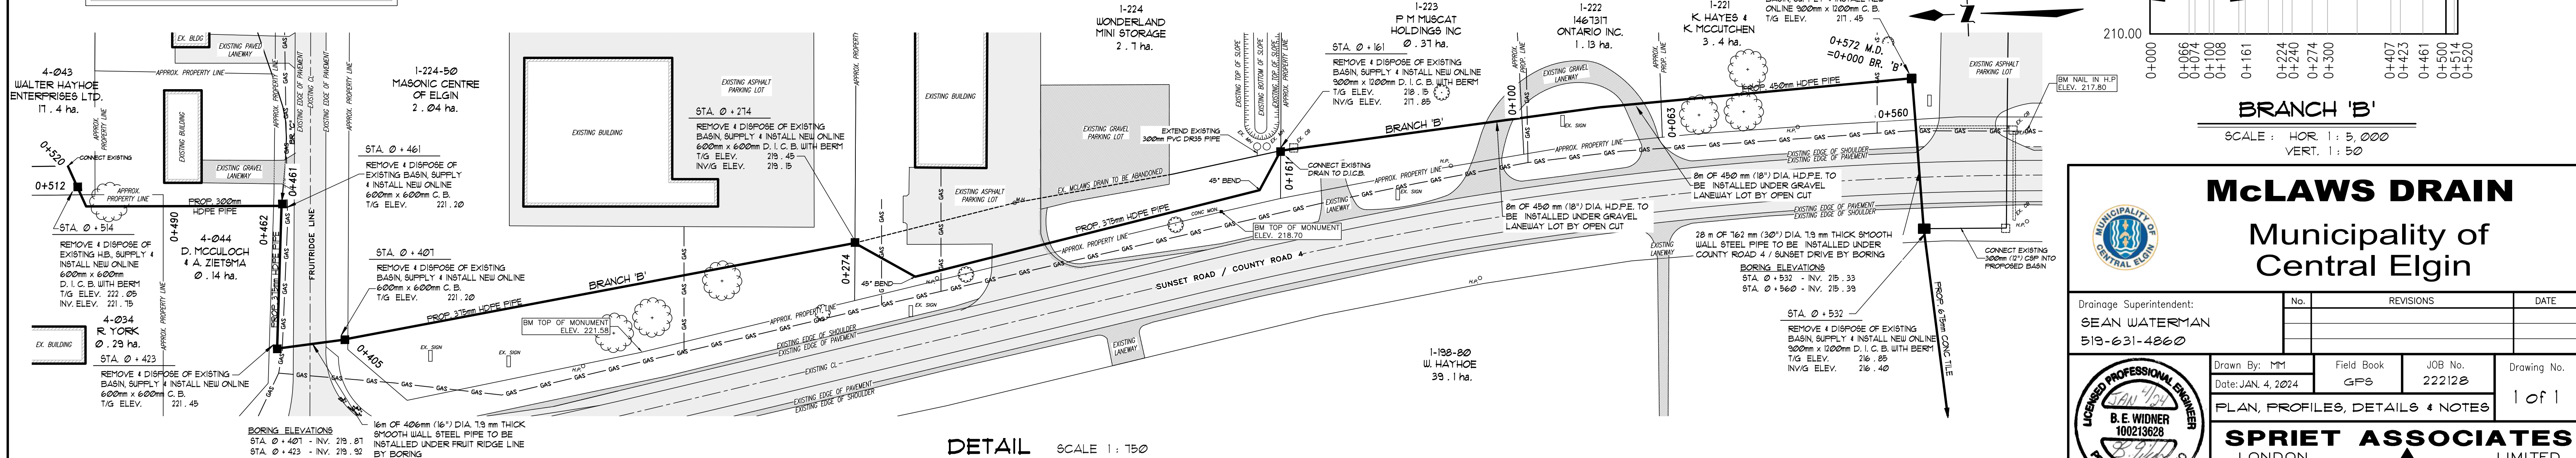


1/ OUR SPECIFICATIONS DATED JANUARY 2020 APPLY TO THIS PROJECT.

- OUR SPECIFICATIONS DATED JANUARY 2020 APPLY TO THIS PROJECT.
- 2/ THE WORKING WIDTH AVAILABLE TO THE CONTRACTOR TO CONSTRUCT THE NEW DRAINS SHALL CONSIST OF THOSE LANDS IMMEDIATELY ADJACENT TO THE DRAIN AND CONNECTIONS AND SHALL NOT EXCEED THE FOLLOWING AVERAGE WIDTHS:
- | | |
|--|-------------|
| CLOSED PORTIONS | - 15 meters |
| THE WORKING WIDTH FOR PURPOSES OF FUTURE MAINTENANCE SHALL BE 10m. | |
- 3/ ALL OWNERS ALONG THE COURSE OF THE DRAIN SHALL MAKE AN ACCESS ROUTE FROM THE NEAREST ROAD TO THE DRAIN LOCATION AVAILABLE TO THE CONTRACTOR THE AVERAGE WIDTH OF THIS ROUTE SHALL NOT EXCEED 8 METERS. THE ACCESS ROUTE SHALL ALSO APPLY FOR FUTURE MAINTENANCE PURPOSES.
- 4/ a) ALL UTILITIES TO BE LOCATED AND EXPOSED PRIOR TO CONSTRUCTION SO THAT THE NEW TILE GRADES FORMED, IF THERE IS A CONFLICT IN ELEVATION BETWEEN THE PROPOSED DRAIN AND THE UTILITY, THE ENGINEER IS TO BE NOTIFIED IMMEDIATELY.
- b) CONTRACTOR TO NOTIFY ALL UTILITIES 12 HOURS PRIOR TO HIS SCHEDULED TIME FOR STARTING THE ABOVE WORK.
- c) THE COST FOR THIS WORK SHALL BE INCLUDED IN THE ITEM ON THE EXTENT OF WORK AND NO EXTRA PAYMENT SHALL BE MADE TO THE CONTRACTOR, EXCEPT IF ROAD RESTORATION IS REQUIRED.
- 5/ ALL TREES, SCRUB, BRUSH, ETC. TO BE CLEARED AND GRUBBED IN ACCORDANCE WITH "SECTION B.3 AND C.4" SPECIFICATIONS.
- 6/ RIP-RAP TO BE SUPPLIED AND INSTALLED IN ACCORDANCE WITH "SECTION A.2B" IN THE SPECIFICATIONS.
- 7/ CONTRACTOR TO ARRANGE A PRE-CONSTRUCTION MEETING WITH THE ENGINEER, DRAINAGE SUPERINTENDENT, AND THE AFFECTED OWNERS. ALL PARTIES SHALL RECEIVE 48 HOURS NOTICE TO THE MEETING.
- 220.00

C L O S E D P O R T I O N S

- a) ALL CONCRETE AND PLASTIC PIPE TO CONFORM TO 'SECTION C' IN THE SPECIFICATIONS.
- a) SEWER PIPE TO BE CONCRETE, H. D. F. E. PLASTIC 3200 C.P.A. (BELL & SPIGOT WITH RUBBER GASKETS CONFORMING TO C.S.A. 1026-08), P.V.C. ULTRA RIB OR S.F.C. SDR 35
- b) CONCRETE TILE SHALL BE HEAVY DUTY, UNLESS SPECIFIED AS 2000 D OR 1400 D ON PROFILE.
- 9/ EXISTING TILE DRAINS TO BE EXPOSED IN AS MANY LOCATIONS AS ARE NECESSARY TO CONFIRM THEIR EXACT LOCATION AND ELEVATION FROM 1/4 CONSTRUCTION. EXACT LOCATION OF NEW TILE DRAINS THEN TO BE CONFIRMED BY DRAINAGE SUPERINTENDENT OR ENGINEER.
- 10/ a) INSTALLATION OF TILE AND TRENCH WIDTHS SHALL BE IN ACCORDANCE WITH 'SECTION C - TILE DRAIN' IN THE SPECIFICATIONS.
- b) ALL CONCRETE TILE AND TILE-PIPE JOINTS TO BE UNRAFFED WITH GEOTEXTILE IN ACCORDANCE WITH 'SECTION C.8' IN THE SPECIFICATIONS.
- c) NO CONSTRUCTION EQUIPMENT OR FARM MACHINERY SHALL CROSS OVER THE MOUNDED BACKFILLED TILE TRENCHES UNTIL SUFFICIENT SETTLEMENT HAS OCCURRED.
- d) STRIP AND STOCKPILE TOPSOIL FROM CONSTRUCTION AREA (4 metre width) FOR ENTIRE LENGTH OF NEW TRENCHES TO REMAIN UNCOVERED. EXPOSED SPOIL TO BE RELEVISED OVER TOPSOIL RELEVISED OVER SPOIL, MOUNDED TRENCH AND REMAINING CONSTRUCTION AREA.
- 11/ a) THE CONTRACTOR SHALL ENSURE THAT ALL TRIBUTARY DRAINS ARE CONNECTED DURING TIME OF CONSTRUCTION. ANY MISSED TILE CONNECTIONS THAT ARE FOUND DURING THE WARRANTY PERIOD OF THE CONTRACT SHALL BE COMPLETED BY THE CONTRACTOR AND SHALL BE PAID THE AMOUNT SET OUT ON PAGE 2 OF THE 'FORM OF TENDER'. NO ADDITIONAL PAYMENT FOR MOBILIZATION WILL BE ALLOWED. THE CONTRACTOR IS NOT RESPONSIBLE FOR COMPLETING MISSED TILE CONNECTIONS THAT ARE FOUND AFTER THE WARRANTY PERIOD FOR THE CONTRACT HAS EXPIRED.
- b) ALL TILE CONNECTIONS TO BE MADE WITH CORING MACHINE AND PLASTIC ADAPTOR OR PREFABRICATED FITTINGS.
- c) THE CONTRACTOR SHALL SUPPLY THE ENGINEER WITH A LIST SHOWING STATIONS OF ALL TILE CONNECTIONS UPON COMPLETION OF CONSTRUCTION.
- 12/ SILT FENCE TO BE PLACED ACROSS DITCH BOTTOM AT 674.0 ± 000 DURING CONSTRUCTION TO PREVENT SILT FROM FLUSHING DOWNSTREAM, AND ARE TO BE MAINTAINED AS NECESSARY DURING CONSTRUCTION. SILT FENCE AND SILT TO BE REMOVED AND DISPOSED OF AFTER CONSTRUCTION.

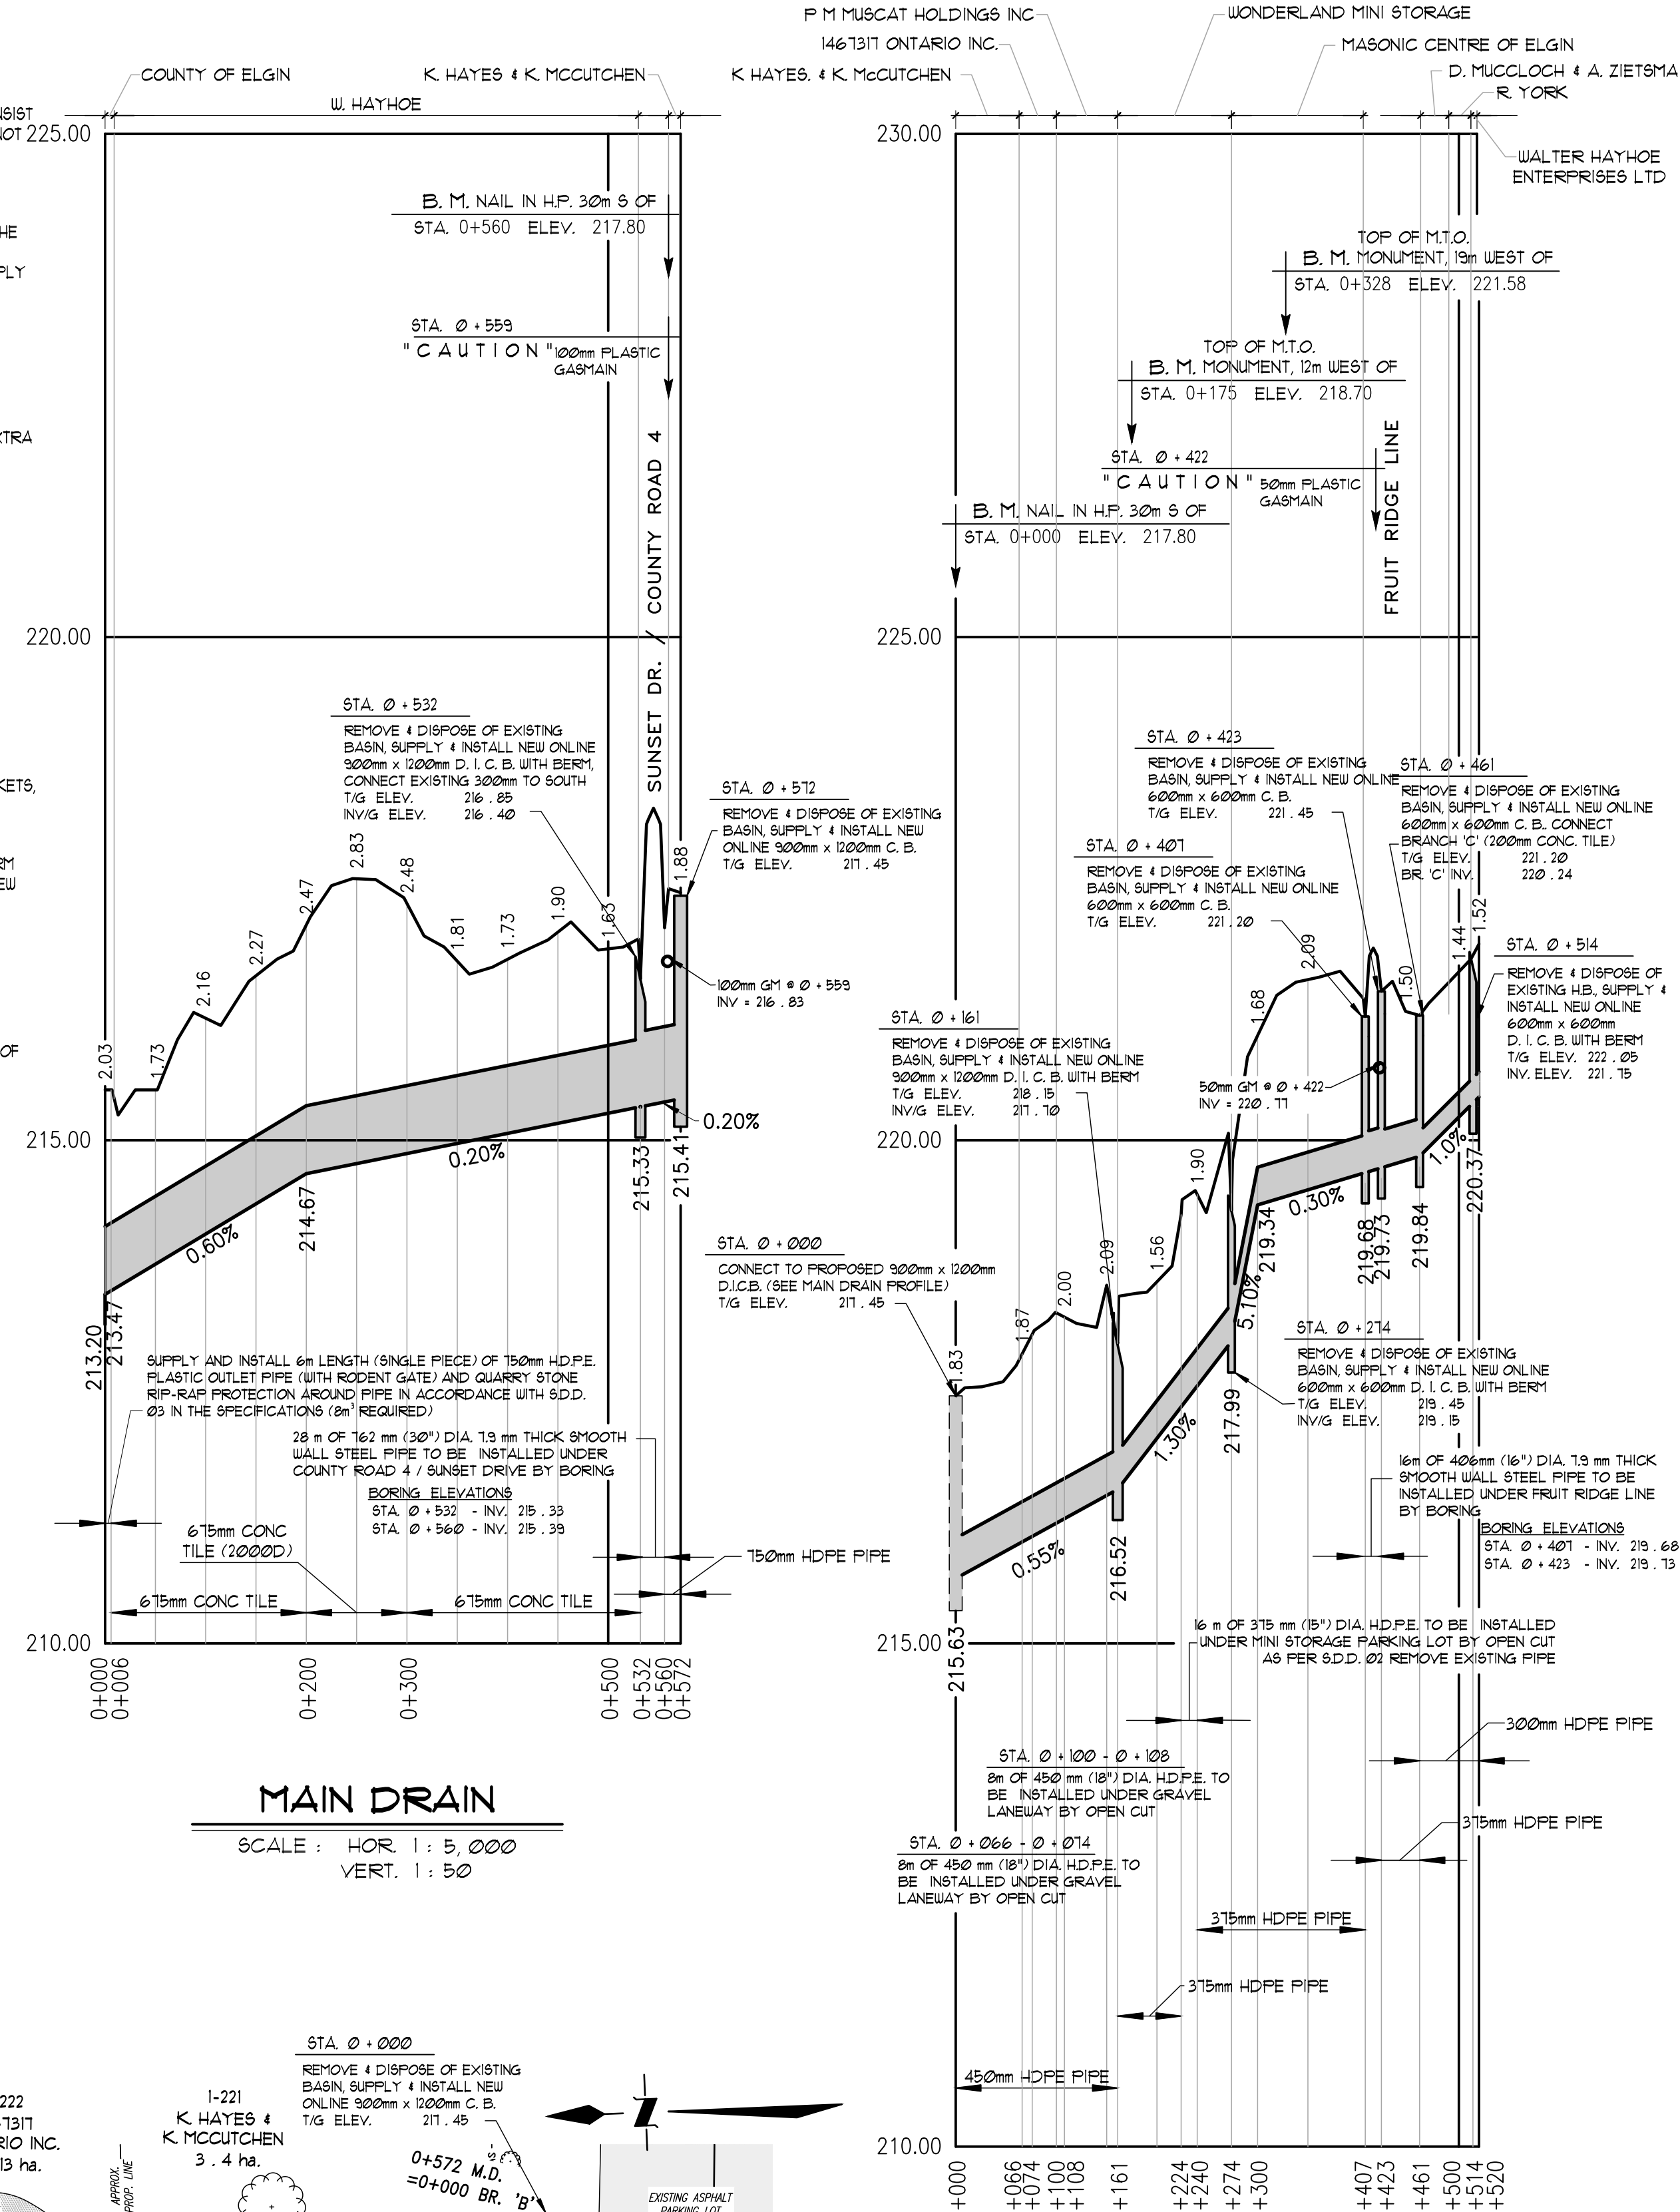

BRANCH 'B'

SCALE : HOR. 1 : 5,000
VERT. 1 : 50

McLAWS DRAIN

Municipality of Central Elgin

Drainage Superintendent:	No.	REVISIONS	DATE
SEAN WATERMAN			
519-631-4860			

	Drawn By: MM	Field Book	JOB No.	Drawing No.
	Date: JAN. 4, 2024	GPS	222128	
	PLAN, PROFILES, DETAILS & NOTES			
				1 of 1

SPRIET ASSOCIATES

SPRIET ASSOCIATES
LONDON CONSULTING  LIMITED ENGINEERS
155 YORK STREET --LONDON (519) 672-4100--N6A 1A8