



GENERAL NOTES

- TIME IS OF THE ESSENCE. THE CONTRACTOR SHALL CO-OPERATE WITH ANY UTILITY COMPANIES WHO MAY BE ON SITE.
- 2. THE LOCATION OF UTILITIES IS APPROXIMATE ONLY AND SHOULD BE DETERMINED BY CONSULTING THE WUNICIPAL AUTHORITIES AND UTILITY COUPANIES CONCERNED. THE CONTRACTOR SHALL PERSPONSIBLE FOR ADOUNTE PROTECTION FROM DAWAGE. THE CONTRACTOR SHALL BE RESPONSIBLE FOR EXPOSING ALL POTENTIALTY OF THE CONTRACTOR SHALL BE RESPONSIBLE FOR EXPOSING ALL POTENTIALTY OF THE CONTRACTOR SHALL BE RESPONSIBLE FOR SUPPORTING ALL UTILITY POLES, AS RECOURTED.

IF ANY CONFLICTS WITH THE EXISTING WATER OR SANITARY SERVICE IS NOTED, THE ENGINEER SHALL BE NOTIFIED IMMEDIATELY.

- THE CONTRACTOR SHALL VERIFY ALL MEASUREMENTS AND REPORT ANY DISCREPANCIES TO ENGINEER FOR RESOLUTION BEFORE STARTING CONSTRUCTION.
- THE CONTRACTOR SHALL MAINTAIN THE FLOW OF ALL EXISTING DRAINS ENCOUNTERED, WHETHER SHOWN ON DRAWINGS OR NOT AND SHALL, WHERE REQUESTED, CONNECTO THE DRAINS INTO THE APPROPRIATE SANITARY OR STORM SEWERS, CONNECTIONS SHALL BE PUD AT JUILT PRICES BID FOR PO.C.'S OR LEADS AS DIRECTED BY THE ENGINEER. ANY ABANDONED PIPES NOT REMOVED SHALL BE SEALED WITH CEVENTI MORTAR.
- ALL SEWERS AND WATERVAINS, INCLUDING CATCHBASIN LEADS AND PRIVATE DRAIN CONNECTIONS, WHETHER EMSTING OR INSTALLED BY THIS CONTRACTOR, WHICH ARE EXPOSED BY A TRENCH, EXCAVATED FOR A PPE CROSSING TO BE WITSHALLED AT LOWER GROOD OR UNDERWINED FOR TO THE LOWER PROPERTY OF THE DIFFERENCE IN PIPE ELECTRONS OF THE SECONDARY OF THE COMPACTION OF BACKFUL BLOWN THE UNDERWINED PIPE WITH A COMPACTION, THE REQUIREMENTS OF STONE WILL THEN BE REDUCED TO THE DEPTH OF BEDDING INACCESSBLE BY THE COMPACTION.
- 6. CONTRACTOR TO EXPOSE AND VERIFY SANITARY SERVICES ELEVATIONS IN LOCATION OF PROPOSED INSPECTION MANHOLE AND SERVICES TO 382 AND 382A PRIOR TO INSTALLATION OF NEW 125mm DIAMETER SANITARY SERVICE SANITARY PIOC. SHALL BE EXTENDED AT STRUCKT GRADE, WHERE POSSIBLE (28 MIN. OR AS SHOWN) TERMINATING AT THE PROPERTY LINE. SANITARY POC CONNECTIONS TO MANUTES MUST BE CUT IN MA. HE LIES OF FACTORY TEE CONNECTIONS, DECEMBER MUST BE SANITARY PIOC. SHALL BE 125mm PVC SDR 28 (WHITE PIPE). SANITARY PIOCS REQUIRE CLEMN-OUTS AT PROPERTY LINE (BY BULLDER).
- BACKFILL UNDER OR WITHIN 1.0m OF EXISTING PAVEMENT SHALL BE GRANULAR IN NATURE. RESTORE ROAD BASE DISTURBED WITH JOOmm GRANULAR 'B' AND 150mm GRANULAR 'A'. MILL 0.5m WDE LAP JOIN (TYPE)
- . THE CONTRACTOR SHALL BE RESPONSIBLE FOR MAINTAINING WATER SERVICE AT ALL TIMES, ALL WATERVAIN VALVES MUST BE OFERATED BY MUNICIPALITY OF CENTRAL ELGIN FORCES CHLORINATED WATER MUST NOT BE DISCHARGED TO THE SANITARY SEVER. ON-CET DECHLORINATION WILL BE REQUIRED. THE-INS TO ENGINE SYSTEMS MUST BE DEFERRED UNTIL SOLATED NEW MAINS ARE CHLORINATED, PRESSURE TESTED AND ACCEPTABLE QUALITY TESTING HAS BEEN COMPLETED.
- TRACKING OF CLEATED EQUIPMENT WILL NOT BE PERMITTED ON PAVED SURFACES. THE CONTRACTOR WILL BE RESPONSIBLE FOR CORRECTING ANY DAMAGE AT HIS COST.
- 10. NATIVE TRENCH BACKFILL WILL BE ACCEPTABLE AND ALL FILL MUST BE PLACED IN 300mm MAX. UNIFORM HORIZONTAL LIFTS (ALL LIMPS MUST BE CRUSHED) AND COMPACTED TO 95% PROCTOR, EXCEPT THE TOP 1.0m WHICH MUST BE COMPACTED TO 85% EARTH FILL MUST BE SHAPED AND COMPACTED INVENDED AT COMPACTED TO SHEAT OF THE STATE OF THE STAT
- 11. THE CONTRACTOR MUST OBTAIN THE ENGINEER'S APPROVAL FOR EACH PREPARED SURFACE BEFORE PROCEEDING WITH SUBSEQUENT WORK, i.e. SUBGRADE, GRANULAR 'B', ETC., TOPSOIL AND SUBSOIL ARE NOT 10 BE UNKED.
- RESTORATION SHALL BE INCLUDED IN PIPE PRICES, ETC. UNLESS OTHERWISE NOTED ON THE FORM OF TENDER. RESTORE DISTURBED AREAS WITH 100mm TOPSOIL AND SEED.
- 13. THE CONTRACTOR SHALL MAINTAIN ONE (1) LANE OF EDITH CAVELL BOULEVARD WHEN POSSIBLE DURING CONSTRUCTION. THE CONTRACTOR IS REQUIRED TO SUBWIT A TRAFFIC CONTROL PLAN IN ACCORDANCE WITH MTO BOOK 7 TO THE MUNICIPALITY OF CENTRAL ELGIN FOR APPROVAL PRIOR TO COUVENCING ANY WORK ONSITE.

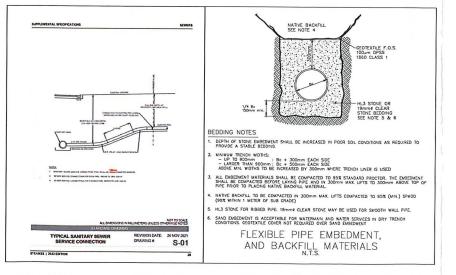

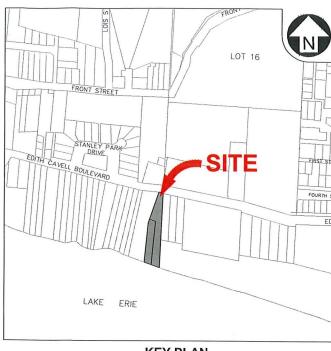

KEY PLAN SCALE 1:3.000

SEDIMENT CONTROL NOTES

- PROTECT ALL EXPOSED SURFACES AND CONTROL ALL RUNOFF DURING CONSTRUCTION.
- ALL EROSION CONTROL MEASURES TO BE IN PLACE BEFORE STARTING CONSTRUCTION AND REMAIN IN PLACE UNTIL RESTORATION IS COMPLETED.
- MAINTAIN AREA DISTURBED DURING CONSTRUCTION.
- PROTECT ALL CATCH BASINS, MANHOLES AND PIPE ENDS FROM SEDIMENT INTRUSION WITH GEOTEXTILE (TERRAFIX 270 R).
- CLEAN ALL SUMPS/SILT FENCES AND CHECK DAMS REGULARLY DURING CONSTRUCTION.
- STRAW BALES TO BE USED IN LOCALIZED AREAS AS DIRECTED BY THE ENGINEER DURING CONSTRUCTION FOR WORKS WHICH ARE IN OR ADJACENT TO FLOOD LINES, FILL LINES AND HAZARDOUS SLOPES.
- ALL EROSION AND SEDIMENT CONTROL PRACTICES WILL BE CHECKED BY OWNER FOR STABILITY AND OPERATION FOLLOWING EVERY RUNOFF-PRODUCING RAINFALL BUT IN NO CASE LESS THAN ONCE EVERY WEEK. ANY NEEDED REPAIRS WILL BE WADE INVEDIMELY.

GRADING NOTES

DATUM - ELEVATIONS ARE REFERRED TO CANADIAN GEODETIC DATUM 1928, GEOID MODEL HT2_2010v70, REFERNCE FRAME NADB3 (CSRS) (2010.0)

OTHER BENCHMARKS SHOWN ON THE DRAWINGS ARE NOT GUARANTEED BY THE MUNICIPALITY OF CENTRAL ELGIN OR BY CYRIL J. DEMEYERE LIMITED.

- ELEVATIONS SHOWN ARE FINISHED GRADE
- REAR YARD SWALES SHALL BE 2% MINIMUM GRADE EXCEPT AS SHOWN
- SWALE SLOPES SHALL BE 3:1 MAXIMUM (V-BOTTOM ACCEPTABLE).
- ALL YARDS SHALL BE GRADED AT 2% MINIMUM TO SWALES EXCEPT WHEN MATCHING EXISTING GRADES AS SHOWN.

MUNICIPALITY OF CENTRAL ELGIN

Cyril J. Demeyere Limite P.O. Box 460, 261 Broadway Tillsonburg, Ontario. N4G 4H8 Tel: 519-688-1000 866-302-9886 Fax: 519-842-3235

380 & 382 EDITH CAVELL BOULEVARD, PORT STANLEY REGISTERED PLAN NO. 117 ADAM DUKELOW

SERVICING PLAN

STAMP **SCALE 1:200**

REVISION

Consulting Engineers

DESIGN BY: GEN DRAWN BY: AK CHECKED BY: DJL DATE BY PROJECT NO. 22099 SURVEY BY: TPM DATE: 30 NOV 2023 DRAWING No.